



E-Z Mite

Sidepan and Troughing

Models



The E-Z Mite Sidepan and Troughing Conveyors are light duty conveyors designed to move loose and packaged materials at inclines up to 30 degrees. The conveyors are lightweight, compact, and fit in tight spaces.

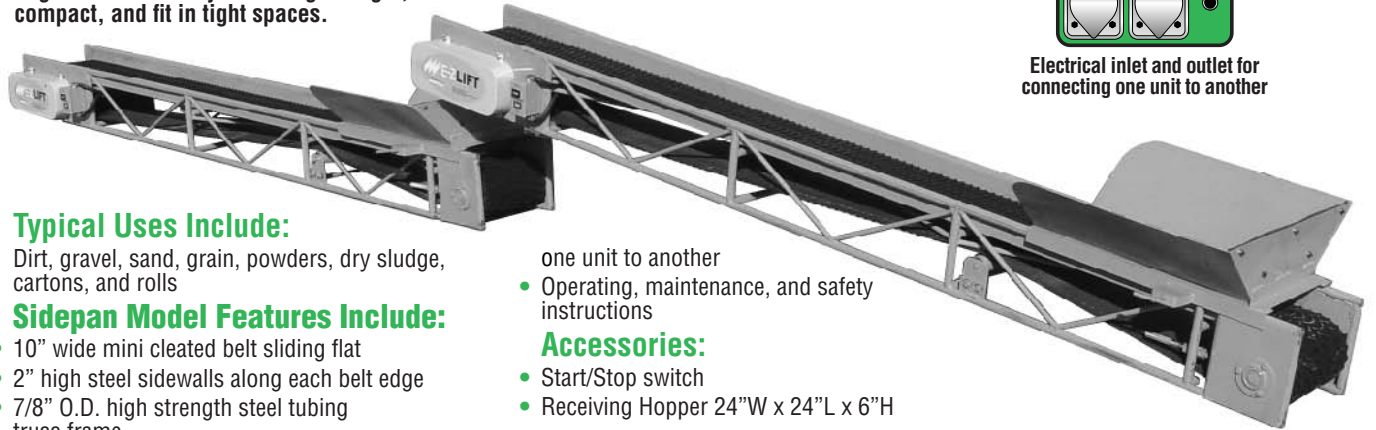

Electrical inlet and outlet for connecting one unit to another

Typical Uses Include:

Dirt, gravel, sand, grain, powders, dry sludge, cartons, and rolls

Sidepan Model Features Include:

- 10" wide mini cleated belt sliding flat
- 2" high steel sidewalls along each belt edge
- 7/8" O.D. high strength steel tubing truss frame
- Frame dimensions – 10" O.A.H. – 17" O.A.W. at drive end – 14" O.A.W. at idle end
- Approximate 50 FPM belt speed
- Conveyor belt take-up adjustments
- 1/4 hp 115v gearmotor mounted within conveyor frame, 2.5 amp draw, and overload circuit breaker
- Safety guards
- Electrical inlet and outlet for connecting

one unit to another

- Operating, maintenance, and safety instructions

Accessories:

- Start/Stop switch
- Receiving Hopper 24"W x 24"L x 6"H

SIDEPAN MODEL		
Model	Length	Approx. Wgt.
10-10	10 ft.	170 lbs.
10-12	12 ft.	180 lbs.
CAPACITY – at 30° incline		
Lbs./Cu. Ft.	Tons/Hr.	
50	10	

Troughing Model Features Include:



- 14" wide smooth belt with 1-1/4" high cleats on 48" centers
- Belt edges highest point of conveyor dimension
- 7/8" O.D. high strength steel tubing truss frame
- Frame dimensions – 10 1/2" O.A.H. – 21" O.A.W. at drive end – 18" O.A.W. at idle end
- Approximate 50 FPM belt speed
- Conveyor belt take-up adjustments
- 1/4 hp 115v gearmotor mounted within conveyor frame, 2.5 amp draw, and overload circuit breaker
- Safety guards
- Electrical inlet and outlet for connecting one unit to another
- Operating, maintenance, and safety instructions

Accessories:

- Start/Stop switch
- Receiving Hopper 24"W x 24"L x 6"H

Options:

- Mini cleated belt

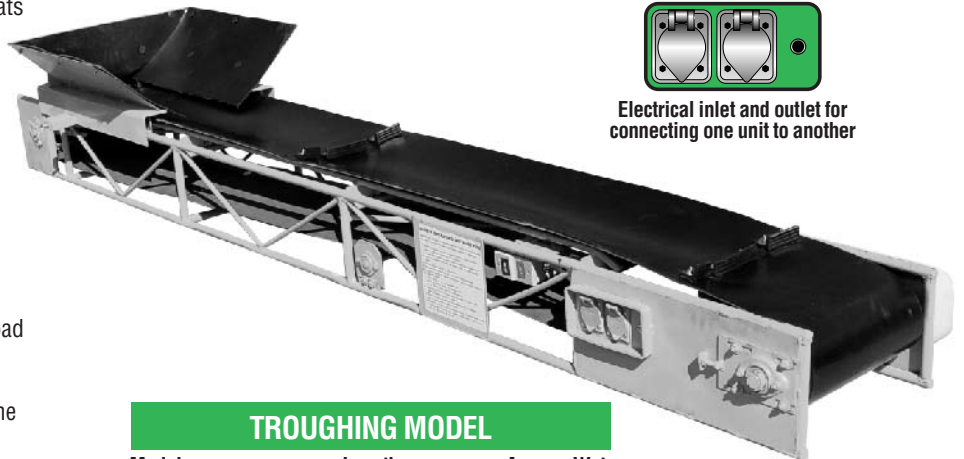

Electrical inlet and outlet for connecting one unit to another

TROUGHING MODEL		
Model	Length	Approx. Wgt.
20-10	10 ft.	190 lbs.
20-12	12 ft.	200 lbs.
CAPACITY – at 30° incline		
Lbs./Cu. Ft.	Tons/Hr.	
50	10	

Multilift, Inc.

2000 South Cherokee, Denver, Colorado 80223
 Denver Area: 303.733.5533 FAX 303.733.5642
 North American Toll Free: 1.800.821.9966