

# E-ZMite

## Troughing

### Model



The E-ZMite Troughing model is a light duty conveyor designed to move loose and packaged materials at inclines up to 30 degrees. The conveyor is lightweight, compact, and fits in tight spaces.

### Features Include:

- 14" wide smooth belt with 1-1/4" high cleats on 48" centers
- 7/8" O.D. high strength steel tubing truss frame
- Belt edges highest point of conveyor dimension
- Frame dimensions - 12" O.A.H. - 21" O.A.W. at drive end - 18" O.A.W. at idle end
- Approximate 50 FPM belt speed
- Conveyor belt take-up adjustments
- Self-cleaning drive and idler pulleys
- 1/4 hp 115V gearmotor mounted within conveyor frame, 2.5A draw, and overload circuit breaker
- Electrical inlet and outlet for daisy chaining multiple units
- Safety guards
- Operating, maintenance, and safety instructions

### Accessories:

- Start/Stop switch
- Receiving hopper - 24"W x 24"L x 6"H
- Detachable dolly

### Options:

- Mini cleated belt

### Typical Uses Include:


Dirt, gravel, sand, grain, powders, dry sludge, cartons, and rolls




Cascading units

TROUGHING MODEL		
Model	Length	Approx. Wt.*
20-10	10 ft.	190 lbs.
20-12	12 ft.	200 lbs.
CAPACITY – at 30° incline		
Lbs./Cu. Ft.	Tons/Hr.	
50	10	


Specifications subject to change without notice  
\*Weight w/o accessories

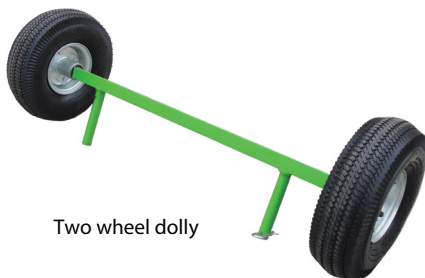

Two wheel dolly



Electrical inlet and outlet for connecting one unit to another

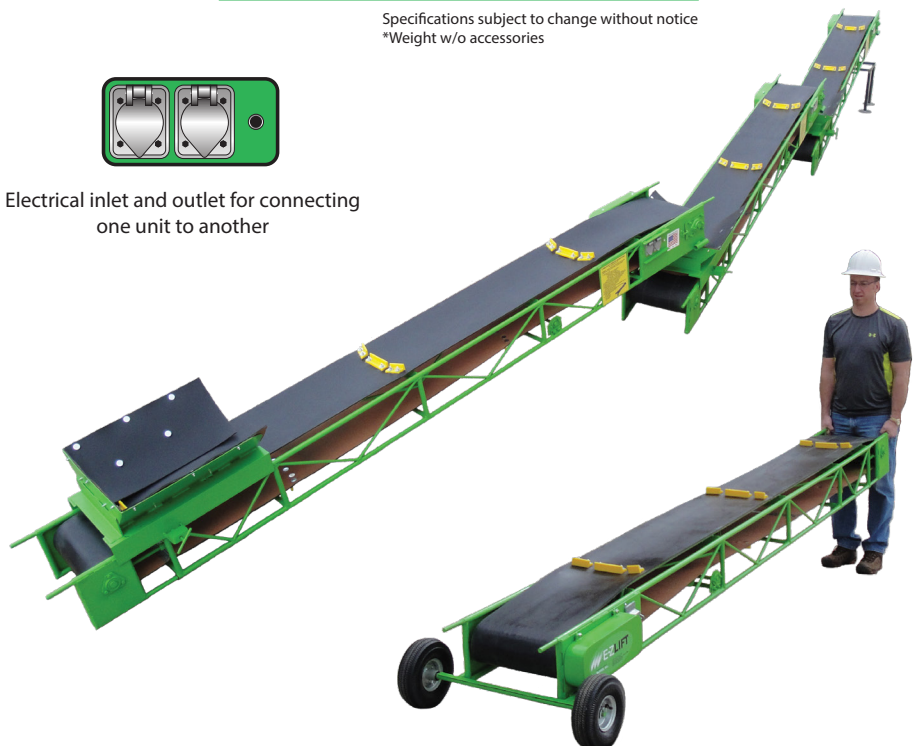

### Multilift, Inc.

12410 W Cedar Dr, Lakewood, Colorado 80228  
Denver Area: 303.733.5533 Fax: 303.733.5642  
North American Toll Free: 1.800.821.9966

Email: ez@ezliftconveyors.com  
Website: www.ezliftconveyors.com